



# CRANK-OUT CANTILEVER WORKSHEET

## RACK ENGINEERING DIVISION, LLC

### PRODUCT DESCRIPTION

Depth \_\_\_\_\_

Width \_\_\_\_\_

Height \_\_\_\_\_

Weight \_\_\_\_\_

Length of material \_\_\_\_\_

Number of levels \_\_\_\_\_

Level capacity \_\_\_\_\_

Arm depth \_\_\_\_\_

Use-able space needed between levels \_\_\_\_\_

Single sided \_\_\_\_\_ Double sided \_\_\_\_\_

Floor space available \_\_\_\_\_

Ceiling height \_\_\_\_\_

Height below crane hook \_\_\_\_\_

Notes \_\_\_\_\_

### CONTACT

Company \_\_\_\_\_

Contact \_\_\_\_\_

Phone Number \_\_\_\_\_

Email \_\_\_\_\_

Quote Date \_\_\_\_\_

Today's Date \_\_\_\_\_

### OPTIONS & ACCESSORIES

- Intermediate support (up to 20' long)
- Stock dividers (all welded or adjustable)
- UHMW lined arms
- Custom colors
- Single or double sided units



# CRANK-OUT CANTILEVER WORKSHEET



## RACK ENGINEERING DIVISION, LLC

### SPECIFICATIONS

#### GENERAL

Levels	20" Deep Arms		24" Deep Arms		30" Deep Arms		36" Deep Arms	
	12"	15"	12"	15"	12"	15"	12"	15"
3-Levels	83 1/2"	95 1/2"	83 1/2"	95 1/2"	83 1/2"	95 1/2"	83 1/2"	95 1/2"
4-Levels	105 1/2"	120 1/2"	105 1/2"	120 1/2"	105 1/2"	120 1/2"	105 1/2"	120 1/2"
5-Levels	127 1/2"	145 1/2"	127 1/2"	145 1/2"	127 1/2"	145 1/2"	127 1/2"	145 1/2"
6-Levels	149 1/2"	170 1/2"	149 1/2"	170 1/2"	149 1/2"	170 1/2"	149 1/2"	170 1/2"
7-Levels	171 1/2"	195 1/2"	171 1/2"	195 1/2"	171 1/2"	195 1/2"	171 1/2"	195 1/2"
8-Levels	193 1/2"	220 1/2"	193 1/2"	220 1/2"	193 1/2"	220 1/2"	193 1/2"	220 1/2"
Depth	62"		70"		82"		94"	
Capacity	6,600 lbs. per arm		5,600 lbs. per arm		4,800 lbs. per arm		4,200 lbs. per arm	

\* Each upright has a 20,000 lbs. capacity stationary top

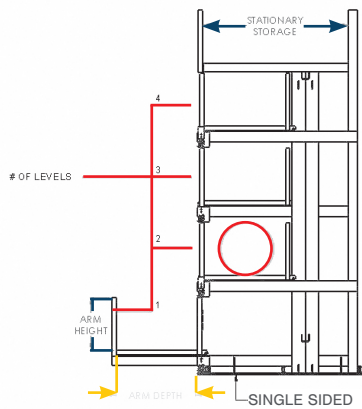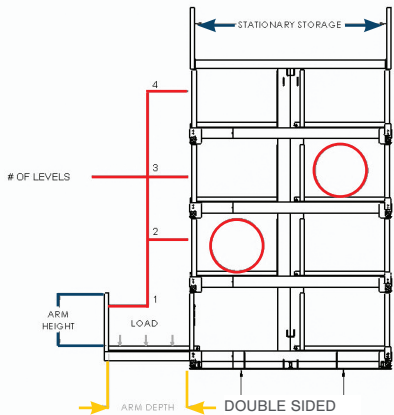

### PART NUMBER EXAMPLE

**CC-4-3-24-15-20**

- Crank-Out Cantilever
- Number of crank-out arm levels (Quantity: 1, 2, 3, 4, 5, 6, 7, 8)
- \*Number of uprights (Quantity: 1, 2, 3, 4)
- Usable arm depth (20", 24", 30", 36")
- Usable arm height (Available in lengths 8" to 24" in 1" increments)
- Length of material being stored (Available in lengths 8" to 24" in 1" increments)